

# Freedome 110

## Technical specification

1



### Technical Data

<b>Floor Area:</b>	110 m <sup>2</sup>
<b>Diameter</b>	12 m
<b>Ceiling Height</b>	6 m
<b>Volume</b>	450 m <sup>3</sup>

### Membrane options

---

**Transparent front (1):** White, opaque PVC membrane with detachable, exchangeable clear, transparent front part, our most versatile solution

---

**Blackout (2):** White, opaque PVC membrane with detachable, exchangeable white, opaque front part, ideal for darkening out the interior

---

**Transparent membrane (3):** Completely transparent PVC cover, ideal for night events, giving you the possibility to create magical light effects

---

**Branded membrane (4):** Fully colour printed membrane or printed detachable front part, ideal to put your brand's message across

---

**Open Dome (5):** unique 2-in-1 solution that combines the classic Freedome shape with a completely innovative mobile stage system


---

\* Opaque PVC membranes can be replaced with non-opaque, single layer cover, perfect for creative lighting effects visible from the outside

### Membrane options



### Dimensions

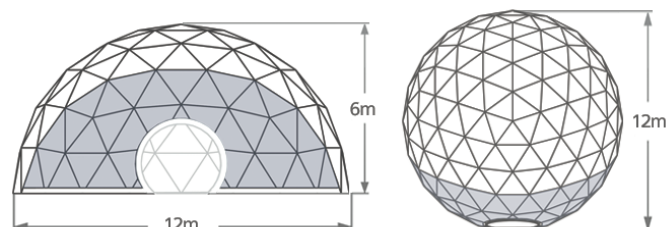

### Membrane material specification

<b>Surface area:</b>	220 m <sup>2</sup> (total) / 41 m <sup>2</sup> (front part only)
<b>Membrane material:</b>	PVC Coated Polyester Fabrics
<b>Thickness:</b>	650 g/m <sup>2</sup> (non-opaque)
<b>Certifications:</b>	Class B1 and M2 of fire resistance according to DIN 4102

### Steel framework

<b>Structure material</b>	Steel S235JR
<b>Structure finish</b>	Hot-dip, double sided galvanised, powder coated white (other RAL colours available)
<b>Struts details</b>	260 struts / 30 mm diameter / 2.0 mm strut's wall thickness
<b>Struts lenghts</b>	1519 min. - 1949 max.
<b>Connecting bolts</b>	M12 zinc-coated bolts
<b>Structure feet number</b>	20

### Entrances / Doors / Openings

<b>Number of entrances</b>	1 (up to 3 optionally)
<b>Width of circular entrance</b>	1.5m (at floor level) / 3.2m (at the center)
<b>Height of circular entrance</b>	2.5m
<b>Membrane door:</b>	2x PVC membrane zip door (white or transparent)
<b>Aluminum-glass door:</b>	Optional double wing aluminum-glass door with anti-panic system and safe glass.
<b>Aluminum-glass door entrance dimensions:</b>	Height: 2m / Width: 1.4m
<b>Ventilation</b>	5 ventilation openings at the top AC / Heating opening available on request
<b>Windows</b>	Circular or triangular transparent membrane windows available on request

### Safety

<b>Windloads</b>	0.5 (dynamic pressure q = kN/m <sup>2</sup> )
<b>Dynamic pressure</b>	11 Beaufort / violent storm
<b>Extra load allowed</b>	550 - 775 kg (suspended load)
<b>Extra load points</b>	Min.: 11 / Max.: 31

### Load parameters

<b>Steel framework</b>	560 kg / 2.0 x 0.7 x 0.95 m
<b>Membrane</b>	160 kg / 1.6 x 1.2 x 0.4 m

### Assembly / Dismantle

<b>Assembly time</b>	6 hours / 8 persons crew
<b>Dismantle time</b>	4 hours / 8 persons crew
<b>Equipment required</b>	Freedomes telescopic-hydraulic jack lift

All sizes, weights and volumes listed in this table are rounded approximations and may deviate due to varying materials or production processes.

All the information in this table refers to our standard configuration and materials. Please contact us if you have queries about dome customization (material types & colours, interconnected structures, flooring, interior accessories, air conditioning, branding, etc..)



**Freedomes - World in a Sphere**  
 ul. Kolbaskowo 148  
 72-001 Kolbaskowo / Poland  
 Phone: +48 91 813 67 27  
 info@freedomes.com  
 www.freedomes.com